




Application/customer benefits

- Swing and grasp the workpiece to three jaw.
(3W is automatically positioned to the center type)
- Suitable for such materials as the casting and forging to process.
- Seal proof for dust and cutting fluid, it is more convenient when maintenance.
- Swing parts are to heat treatment hardened and ground for steel, in order to improve products service life.
- Swing and grasp the workpiece to three jaw.
(3W-C is center compensation type)
- The workpieces compensation of eccentric is 2 mm, fixed position for the center thimble.

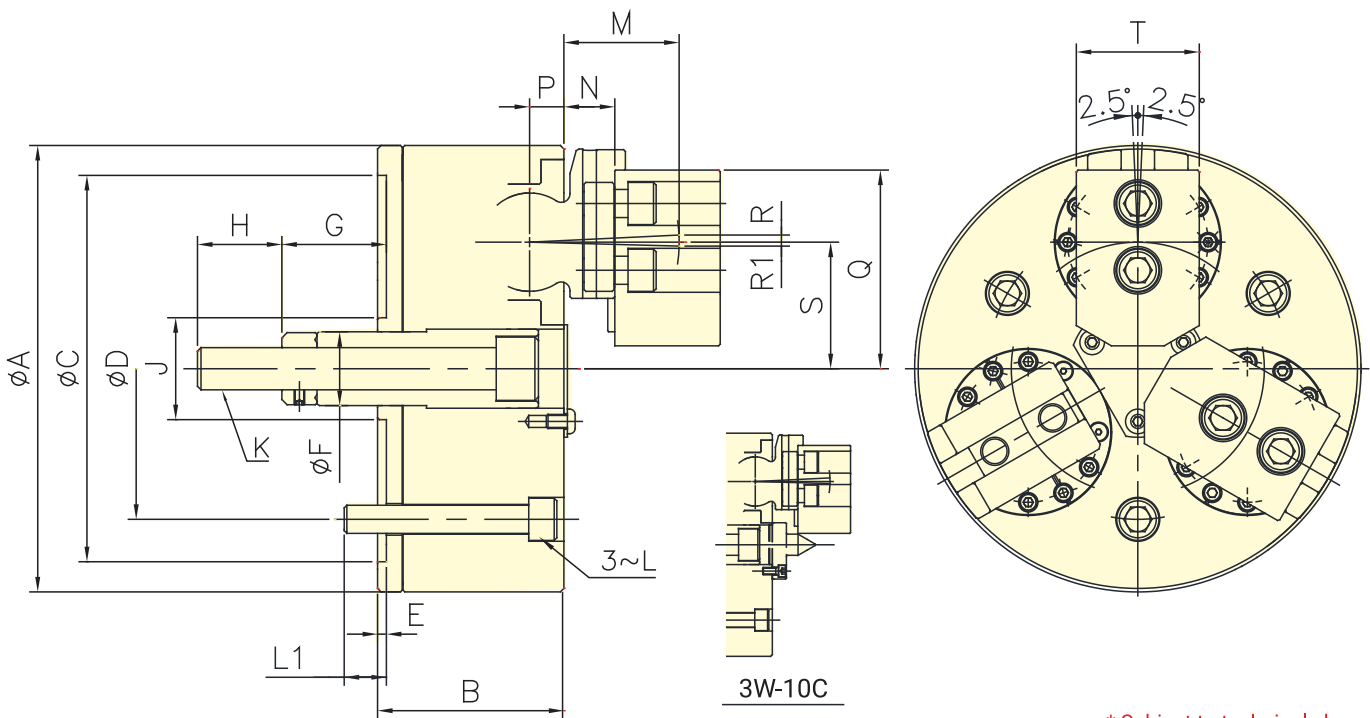

* Subject to technical changes.

Specifications

Model	Plunger stroke (mm)	Jaw stroke (Dia.) (mm)	Chucking Dia. Max. (mm)	Chucking Dia. Min. (mm)	Max. D.B. pull kN (kgf)	Max. clamping force kN (kgf)	Max. speed min ⁻¹ (r.p.m.)	I kg · m ²	Weight (kg)	Matching cyl.	Compensation (mm)
3W-10	17.5	12.5	205/235	50/85	35.3(3600)	105.9(10800)	2500	0.37	48.6	RK-150N	-
3W-10C	17.5	12.5	205/235	50/85	35.3(3600)	105.9(10800)	2500	0.37	48.6	RK-150N	2

Dimensions

Model	A	B	C(H7)	D	E	F	Gmax.	Gmin.	H	J	K	L	L1	M	N	P	Q	R	R1	S	T
3W-10	254	106	220	171.4	5	42	67.5	50	48	58	M24x3	M16	24	65.6	29	19.5	113	4.03	2.26	72	70
3W-10C	254	106	220	171.4	5	42	67.5	50	48	58	M24x3	M16	24	65.6	29	19.5	113	4.03	2.26	72	70